





LEADER SOLAR

MAXIMUM SOLAR POWER MAKE MAXIMUM SAVINGS

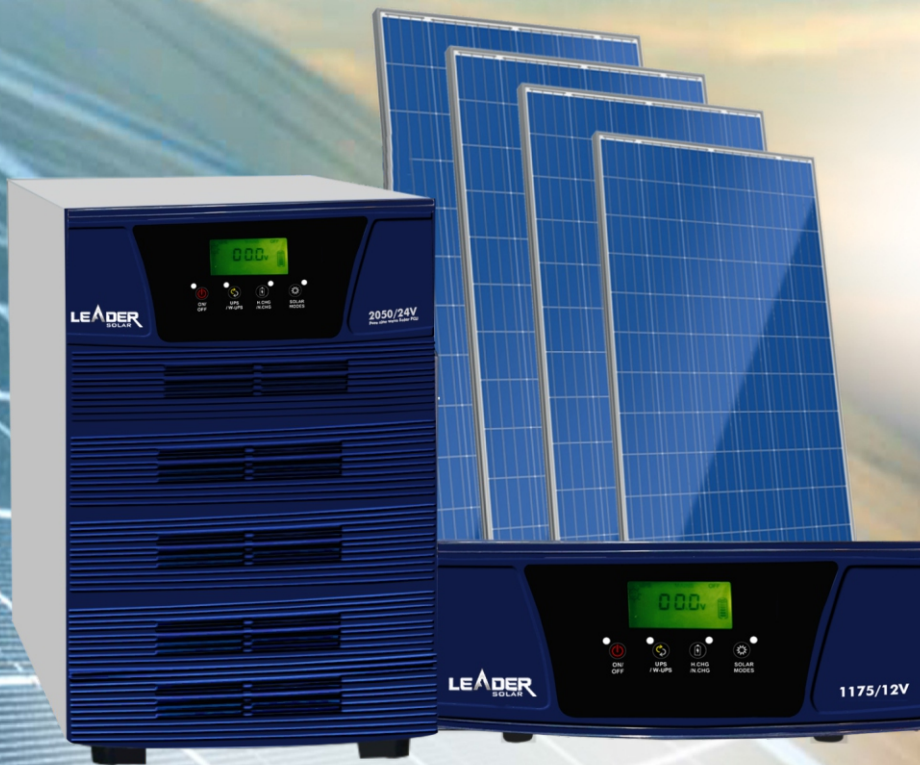

Solar Lead technology



Extra Broad operating Voltage window (90 to 290V)



LCD Display (To control & monitor real time data)



Pure sine wave output

“Saves Upto 40% of your electricity bills by using intelligent Solar lead technology”

Salient Features



Built-in 50 A solar Charging controller:
supports ultra fast charging.



In-Built Live clock:
To optimize solar utilization.



Solar Lead technology & charge sharing:
Maximise the savings.



LCD Display Panel:
Make convenient to monitor & control your system



Pure Sine Wave O/P:
Perfect for all sensitive Loads.



Heavy duty Grid Charger:
2X Ultra fast Charging



Extra broad Operating volt. window (90-290V):
Perfect for Low & High Voltage Areas



6 Stage battery Charging:
Ensures the healthy Battery Life & Long Backup.



Zero Switch Over Time:
Can Smoothly Run IT & NON-IT Loads.

Advantages of using Leader Solar PCU

NORMAL PCU VS LEADER PCU

Parameter	Normal PCU	Leader PCU
Solar Charge Controller Rating	20Amp.	50Amp.
Grid Charger	10-12 Amp.	18-22 Amp.
In-Built Live Clock	x	✓
Customer Settable Solar Settings	x	✓
Pcu Output	Artificial Sine Wave	Pure Sine Wave
Operating Window	180-260V	90-290V
Intelligent Charge Sharing	x	✓
Lcd Display	x	✓
Equalization Charging Profile	x	✓
Charging Stages	3 Stage	6 Stage
Zero Switch Over	x	✓